


## Product Description

Bicor 32COS is a biaxially oriented transparent polypropylene film, coated one side acrylic, one side PVdC layer. This film has been specially developed for cosmetic box overwrap applications. It provides outstanding optics, scratch and alcohol resistance on the PVdC layer side and improved sealing performance.

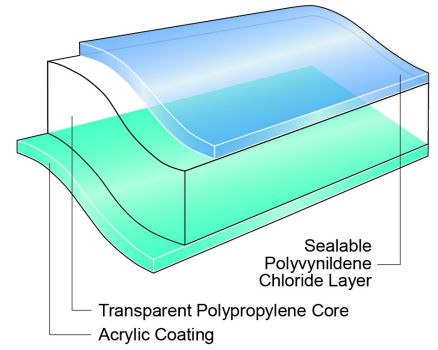

## Key Features

- Outstanding optical properties
- Scratch and alcohol resistant on PVdC layer side
- Good low pressure sealability
- Excellent seal strength and hot tack
- Water based coatings

## General

### Availability

- ✓ Africa & Middle East
- ✓ Europe

### Features

- ✓ Acrylic Coated
- ✓ In Lamination Lap Sealable
- ✓ Humidity Resistant

### Applications

- ✓ Health and Beauty Care
- ✓ Household and Detergents

### Uses

- ✓ Box Overwrap Flexible Packaging
- ✓ HFFS Flexible Packaging
- ✓ Pre-made Bags - Flexible Packaging
- ✓ VFFS Flexible Packaging

### Appearance

- ✓ Clear/Transparent

### Processing Method

- ✓ Cold Seal Adhesive
- ✓ Inner Web Adhesive Lamination
- ✓ Outer Web Adhesive Lamination
- ✓ Solvent Flexographic Printing
- ✓ Solvent Rotogravure Printing
- ✓ Surface Print Unsupported

## Properties

Property	Typical Value	Unit	Test Based On
Yield	34.0	m <sup>2</sup> /kg	Internal Method
Unit Weight	29.4	g/m <sup>2</sup>	Internal Method
Film Thickness	32	μ	Internal Method
Gloss(45°)	98		Internal Method
Haze	1.7	%	Internal Method
Tensile Strength at Break 200 mm/min pull rate, 120 mm jaw separation			
MD	160	Mpa	Internal Method
TD	290	Mpa	Internal Method
Dimensional Stability 135°C / 275°F, 7 min			
MD	-6.0	%	Internal Method
TD	-5.5	%	Internal Method
Elongation at Break 200 mm/min pull rate, 120 mm jaw separation			
MD	175	%	Internal Method
TD	60	%	Internal Method
Elastic Modulus			
MD	2000	Mpa	Internal Method
TD	3800	Mpa	Internal Method
Seal Strength (ESM)			
<i>PVdC/PVdC</i>			
105°C, 0.034 Mpa, 2 sec	300	g/2.5 cm	Internal Method
<i>Acrylic/Acrylic</i>			
95°C, 0.034 Mpa, 2 sec	300	g/2.5 cm	Internal Method
Seal Strength (LPS)			
<i>Acrylic/Acrylic</i>			
100°C, 0.003 Mpa, 0.5 sec	200	g/2.5 cm	Internal Method
<i>PVdC/PVdC</i>			
110°C, 0.003 Mpa, 0.5 sec	200	g/2.5 cm	Internal Method
Heat Seal Range			
<i>Acrylic/Acrylic</i>	55	°C	Internal Method
<i>PVdC/PVdC</i>	40	°C	Internal Method
Coefficient of Friction			
<i>Acrylic/Acrylic</i>	0.25		Internal Method
<i>PVdC/PVdC</i>	0.35		Internal Method

## Legal Statement

Contact your Jindal Films Customer Service Representative for potential food contact application compliance (e.g. FDA, EU,HPFB). This product is not intended for use in medical applications and should not be used in any such applications.

## Footnotes

1. Product may not be available in one or more countries in the identified Availability regions. Please contact your Sales Representative for complete country availability.

## Revision date

September 19, 2018

Typical properties: these are not to be construed as specifications.

© 2018 Jindal Films. Jindal Films, the Jindal Films' logo, and other product or service names used herein are trademarks of Jindal Films, unless indicated otherwise. You may not upload, display, publish, license, post, point to, frame, transmit or distribute either this document or its information, whether in whole or in part, without Jindal Films' prior written authorization. To the extent Jindal Films provides prior written authorization, the user may use the document or its information only if the document is unaltered and complete, including all of its headers, footers, disclaimers and other information. Any data included herein may be based upon: analyses of representative samples and not the actual product shipped, typical values, or otherwise. The information in this document relates only to the named product or materials when not in combination with any other product or materials. We base the information on data believed to be reliable, but we do not represent, warrant, or otherwise guarantee the accuracy, reliability, or completeness of this information; nor do we warrant, expressly or impliedly, the merchantability, fitness for a particular purpose, freedom from patent infringement, or suitability of the products, materials or processes described. The user is solely responsible for all determinations regarding any use of material or product and any process in its territories of interest. We expressly disclaim liability for any loss, damage or injury directly or indirectly suffered or incurred as a result of, or related to, anyone using or relying on any of the information in this document. This document is not an endorsement of any non-Jindal Films' product or process, and we expressly disclaim any contrary implication. The terms "we," "our," "Jindal Films" and "Jindal" are each used for convenience, and may include Films Americas LLC, Jindal Films Americas LLC, Films Europe S.à.r.l., Jindal Films Virton SPRL, Jindal Films India Ltd., or any companies affiliated with them in the production and sale of film products. There are a number of such affiliated companies, some with names including "Jindal" or "Films" and some not. Neither these terms and conditions, nor anything else in this document, is intended to override or supersede the legal separateness of those affiliated companies and responsibility for local action and accountability remains with them.